

Flueing options

Flue A options						Article No
Flue length (m)	1.5	2.5	3.5	4.5	5.5	
2m Extension			1	1	2	0020118013
1m Extension		1		1		0020118014
Anti Plume Kit	N/A	N/A	N/A	N/A	N/A	0020118018
Vertical Flue adaptor	1	1	1	1	1	0020118019
Sliding Sleeve	Optional	Optional	Optional	Optional	Optional	0020118020
Flexible pitch Roof Seal	Optional	Optional	Optional	Optional	Optional	0020118021
Flat Roof penetration	Optional	Optional	Optional	Optional	Optional	0020118022
Vertical Terminal	1	1	1	1	1	0020118023
Terminal deflector kit	N/A	N/A	N/A	N/A	N/A	0020123786
Flue support clips (x3)		1	1	1	1	0020118017

The maximum physical flue length in this configuration cannot exceed 6 metres.

Flue C options		Article No
Flue length (m)	2.6	
2m Extension		0020118013
1m Extension	2	0020118014
90° Elbow	2	0020118015
2x45° Elbow		0020118016
Anti Plume Kit	Optional	0020118018
Vertical Flue adaptor	1	0020118019
Sliding Sleeve	Optional	0020118020
Flexible pitch Roof Seal		0020118021
Flat Roof penetration collar		0020118022
Vertical Terminal	1	0020118023
Terminal deflector kit	Optional	0020123786
Flue support clips (x3)	1	0020118017

The maximum physical flue length in this configuration cannot exceed 3 metres.

Flue D options							Article No
Flue length (m)	0.6	1.6	2.6	3.6	4.6	5.6	
Standard flue kit	1	1	1	1	1	1	0020118012
2m Extension			1	1	2	2	0020118013
1m Extension		1		1		1	0020118014
90° Elbow							0020118015
2x45° Elbow							0020118016
Anti Plume Kit	Optional	Optional	Optional	Optional	Optional	Optional	0020118018
Terminal deflector kit	Optional	Optional	Optional	Optional	Optional	Optional	0020123786
Flue support clips (x3)		1	1	1	1	2	0020118017

The maximum physical flue length in this configuration cannot exceed 6 metres.


Flue E options			Article No
Flue length (m)	2.6	3.6	
Standard flue kit	1	1	0020118012
2m Extension		1	0020118013
1m Extension	2	1	0020118014
90° Elbow	2	2	0020118015
2x45° Elbow			0020118016
Anti Plume Kit	Optional	Optional	0020118018
Terminal deflector kit	Optional	Optional	0020123786
Flue support clips (x3)	1	1	0020118017

The maximum physical flue length in this configuration cannot exceed 4 metres.

Flue G options					Article No
Flue length (m)	2.6	3.6	4.6	4.6	
Standard flue kit	1	1	1	1	0020118012
2m Extension		1	1	2	0020118013
1m Extension	2	1	2		0020118014
90° Elbow					0020118015
2x45° Elbow	1	1	1	1	0020118016
Anti Plume Kit	Optional	Optional	Optional	Optional	0020118018
Terminal deflector kit	Optional	Optional	Optional	Optional	0020123786
Flue support clips (x3)	2	2	2	2	0020118017


The maximum physical flue length in this configuration cannot exceed 5 metres.

Product dimensions

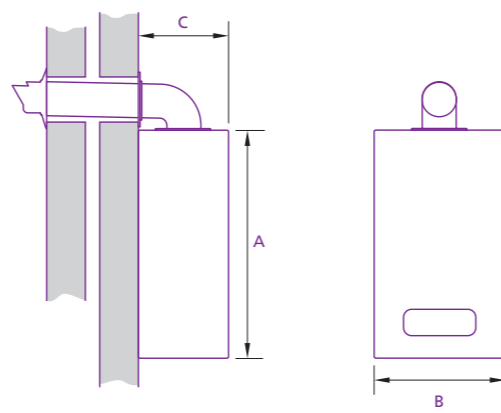

Range	A	B	C
Capriz ₂	Height	Width	Depth
Capriz ₂ 24 (mm)	740	418	300
Capriz ₂ 28 (mm)	740	418	300

Clearances

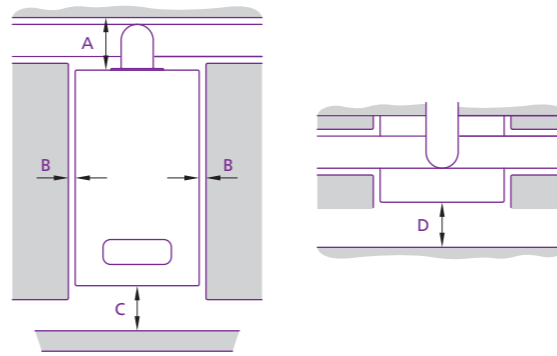

Range	A	B	C	D
Capriz ₂	Top flue	Side	Bottom	Front
Capriz ₂ 24 (mm)	300	5	300	600
Capriz ₂ 28 (mm)	300	5	300	600

2 YEAR WARRANTY



Capriz₂
24 & 28

high efficiency combi range



Key features and benefits
24kW & 28kW

Heatline
Nottingham Road
Belper
Derbyshire
DE56 1JT

Tel: 01773 596 099
Fax: 01773 828 123
Email: sales@heatline.co.uk
www.heatline.co.uk



CAP2BR016

Introducing... Capriz₂

The Heatline Capriz₂ high efficiency condensing combination boiler is available in 24kW and 28kW outputs and comes fitted with a 24 hour easy-to-use analogue timer. The Heatline Capriz₂ is an ERP A rated boiler and achieves a SEDBUK 2009 efficiency rating of 89.3%.

Our lightweight easy-to-install boiler is an excellent choice for those requiring a no-nonsense, value for money combi solution and is supported with a 2 year manufacturer parts and labour warranty for further peace of mind.

Key Features

- High quality automotive grade aluminium heat exchanger providing excellent performance
- Compact and lightweight for easy installation
- High efficiency, A rated boiler for ErP energy labelling to reduce energy bills
- Grundfos modulating pump for reduced energy use
- User friendly controls - digital diagnostic display
- Factory fitted analogue timer
- In-built frost protection
- 2 year parts and labour warranty

Easy Installation

- Compact size:
24kW - 740mm (h) x 418mm (w) x 300mm (d)
28kW - 740mm (h) x 418mm (w) x 300mm (d)
- Lightweight:
24kW - 33.3kg
28kW - 33.3kg
- Push fit flue system
- Easy wiring



Capriz ₂ Specification		
CaprizPlus	24kW	28kW
Size		
Casing dimensions (h w d) (mm)	740/418/300	740/418/300
Weight (lift)	33.3kg	33.3kg
Performance		
CH output (kW) Min/Max	5.3/18.4	6.3/24.7
DHW output (kW) Min/Max	8/24	9.5/28
DHW flow rate storage/combi (l/min. 35°C rise)	10.0	11.7
SEDBUK rating 2009	89.3	89.3
NOx class 5 (natural gas)	Yes	Yes
LPG Compatible	No	No
Construction		
Main heat exchanger type	Aluminium	Aluminium
Burner type	Aluminium	Aluminium
Fully modulating	Yes	Yes
DHW plate heat exchanger	Yes	Yes
Integrated hydrobloc	Yes	Yes
Installation		
Suitable for sealed systems	Yes	Yes
Inbuilt automatic bypass	Yes	Yes
Inbuilt condensate trap/siphon	Trap	Trap
Inbuilt boiler frost protection	2 stage	2 stage
Zero compartment ventilation	Yes	Yes
Clearances		
Top (mm) (from top of boiler)	300	300
Side (mm)	5	5
Bottom (mm)	300	300
Front (mm) ²	600*	600*
User Interface		
User adjustable CH temp control	Yes	Yes
User adjustable DHW temp control	Yes	Yes
Pre-fitted analogue timer	Yes	Yes
Pipes		
Optional spacing frame	Yes	Yes
Water connections	2x22/2x15mm	2x22/2x15mm
Flues		
Max horizontal Ø60/100	9m	9m
Max vertical Ø60/100	9m	9m
Optional plume management kit Ø60/100	Yes	Yes

*5mm if removable panel or door

Capriz₂ Specification

